



DATE	REV	DESCRIPTION	BY	CHKD
10/27	A/O	NEW		

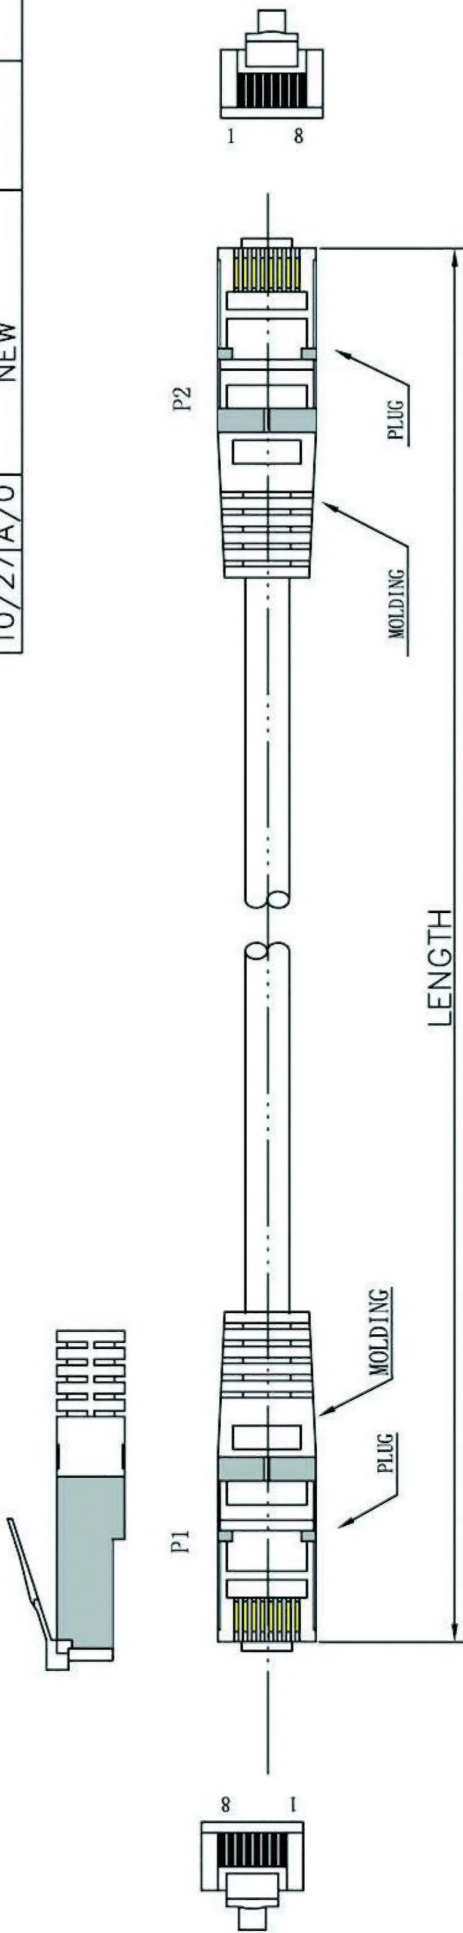


Marking:<LP009> FTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 3P VERIFIED FOR
GIGABIT ETHERNET 26AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3

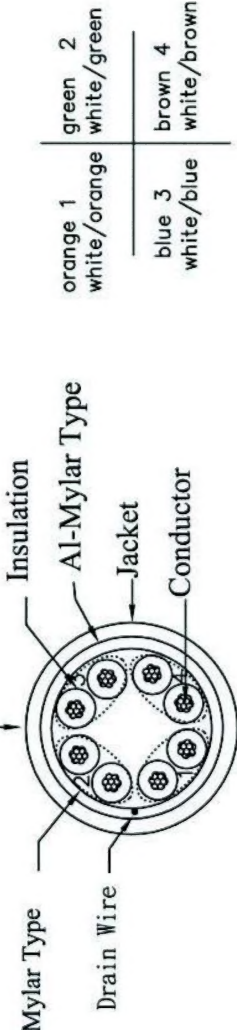

Conductor	Bare Copper	
Insulation	26AWG 7/0.152±0.005mm	
Jacketing	PVC	Thickness: MIN at any point 0.15mm MAX AVG 0.25mm Diameter: 0.85±0.06mm
		Thickness: MIN at any point 0.50mm MAX AVG 0.60mm Diameter: 5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG	
PLUG	YS-01	
Length	1.0M	
WIRE COLOR	GY825	

ROHS Compliant

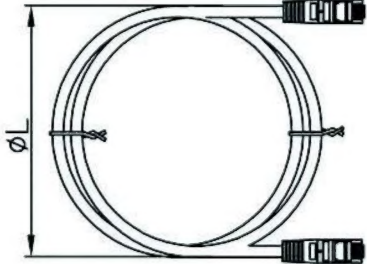

PA/R	PINOUT	
	P1 (T568B)	P2 (T568B)
1	1	1
	2	2
2	3	3
	6	6
3	4	4
	5	5
4	7	7
	8	8

Unless specified on the drawing, tolerances are per the follows:
.X ± 1
.XX ± 0.2
.XX ± 0.05

DRAW.NO	ITEM	EUT-701	
DEPARTMENT	R&D	DRAW	DATE
SCALE	CHECKER	CHECKER	2008/10/27
UNIT	SHEET	1	OF 1

